
LOADING INSTRUCTIONS

Procedure and approach



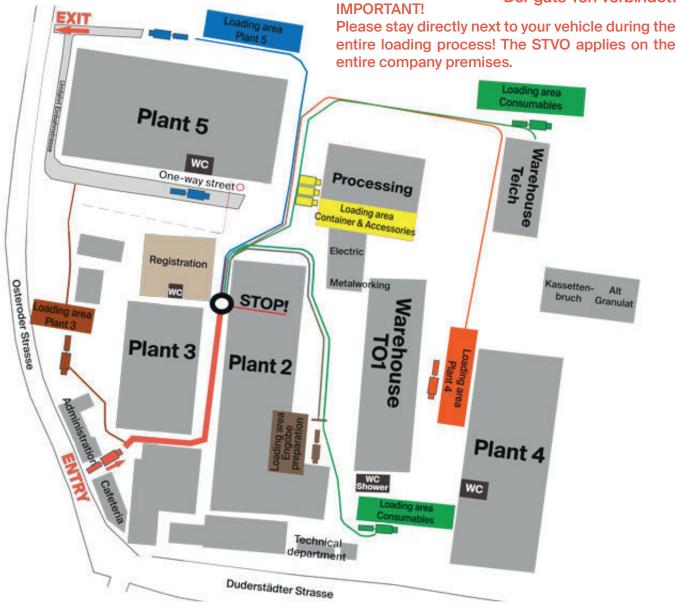

- You have received your loading documents from the site manager's office.

 Our employees will now allocate you an appropriate loading or unloading space.
- The loading area of your vehicle must be completely accessible and clean so that our forklift driver can start the loading and unloading process. This means that all flaps or tarpaulins must be completely open. After sweeping off your loading area, waste garbage cans are available for disposal. After the first partial load, the forklift driver will inform you of the next steps and the further loading locations.
 - Once the loading process is complete, a final check is carried out to ensure that the load is complete. All flaps and tarpaulins must remain fully open until this time.
- 3. In the meantime, however, you have the opportunity to secure your load in accordance with the current regulations. We expressly point out that you as the carrier must carry and use sufficient lashing equipment and edge protectors. In principle, the use of edge protectors is mandatory.
- 4. You will then receive your delivery bills at the site manager's office and can start your journey. Please leave our premises at the designated factory exit.





Further information and languages:

